

Written By: Walter Galan



INTRODUCTION

This guide will show you how to replace the Mid Wall on from your laptop.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)



PARTS:

- [MacBook Pro 15" Unibody \(Late 2008/Early 2009\) Mid Wall](#) (1)

Step 1 — Access Door



- With the case closed, place the Unibody top-side down on a flat surface.
- Depress the grooved side of the access door release latch enough to grab the free end. Lift the release latch until it is vertical.

Step 2




- The access door should now be raised enough to lift it up and out of the Unibody.

Step 3 — Battery




- ❗ Be sure the access door release latch is vertical before proceeding.
- Grab the translucent plastic tab and pull the battery up and out of the Unibody.
- If the latch is depressed it will lock the battery in place.

Step 4 — Lower Case

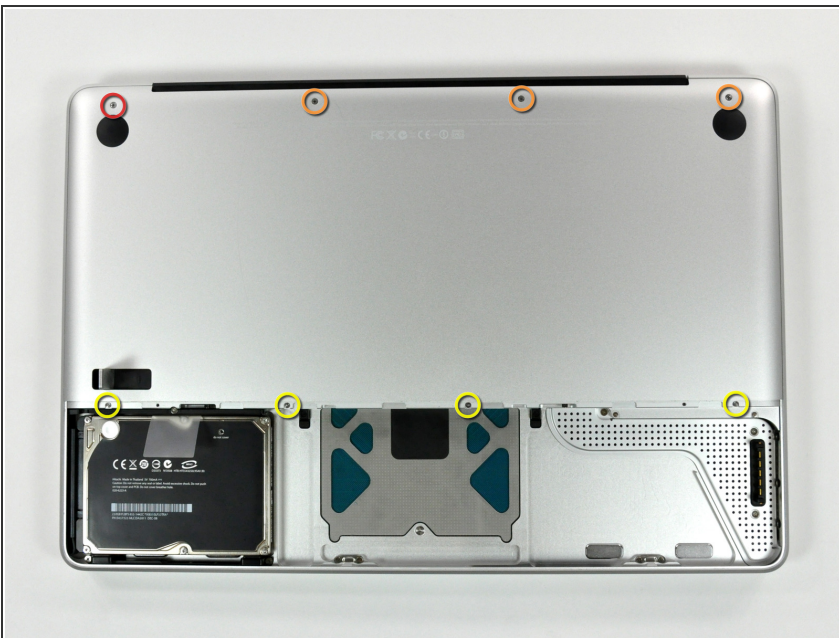

- Remove the following eight screws securing the lower case to the chassis:
 - One 5.4 mm Phillips screw.
 - Three 14 mm Phillips screws.
 - Four 3.5 mm Phillips screws.

Step 5

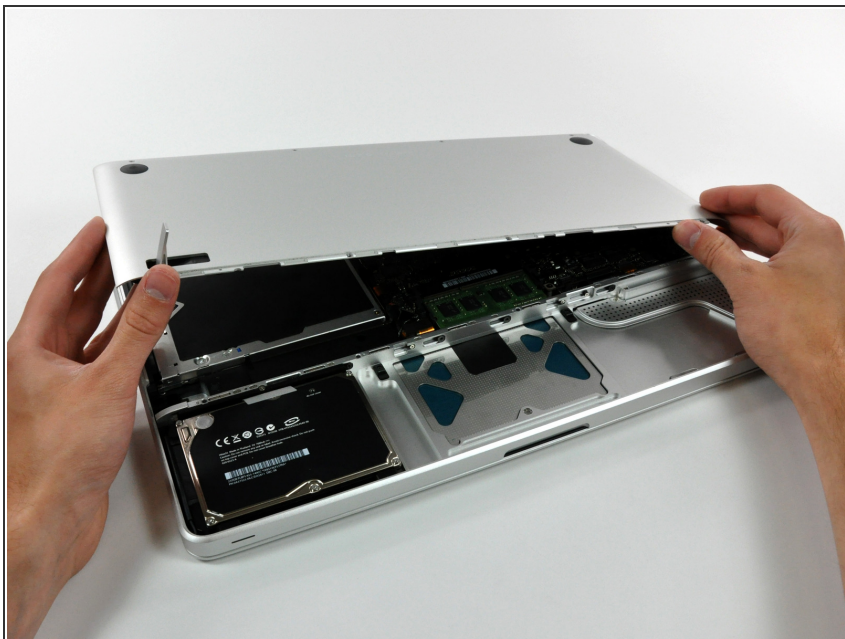

- Using both hands, lift and remove the lower case off the upper case.

Step 6 — Mid Wall



- Remove the following 5 screws securing the mid wall to the upper case:
 - Three 10.5 mm Phillips screws.
 - Two 3.7 mm Phillips screws.

Step 7



- Lift the mid wall out of the upper case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-22 07:06:53 AM.